

SSB SERIES

15W 16W 20W 25W 27W 30W 36W 40W



SOLID STATE LED BATTEN



The SSB series has been product developed for the Australian market allowing superior energy savings without compromising lumen output.

Considered the revolutionary replacement for traditional weatherproof fluorescent fittings, our SSB series combines sleek 'tube less' design with top of the range LED components to deliver performance and power for the market place.

SPECIFICATIONS

CCT	3000k-6000k
Chip Type	2835 White SMD LED
Dimmable	No
Ingress Protection	IP20
Sensor	No
Emergency	No
IPART Approved	Yes

MAIN FEATURES

- High efficacy rating
- >80 colour render index rating*
- SAA Approved
- EEIS (ACT) Approved
- High grade PC materials
- Weatherproof
- Colour changeable with dip switches
- 3 Year Warranty

*Available upon request

APPLICATIONS

- Fire escapes
- Indoor lighting
- Residential
- Retail Shops
- Offices


SSB SERIES

SOLID STATE LED BATTEN 15W 16W 20W 25W 27W 30W 36W 40W

PRODUCT PARAMETERS

Part Number	Size	Wattage	CRI	Luminous Flux	Light Efficiency	Input Voltage	Powerfactor	Driver
SSB-15W-2FT-WOLFE-CC	L600*W80*H65mm	15W	>80	1500lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-15W-2FT-WOLFE-XX	L600*W80*H65mm	15W	>80	1500lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-20W-2FT-WOLFE-CC	L600*W80*H65mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-20W-2FT-WOLFE-XX	L600*W80*H65mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-25W-2FT-WOLFE-CC	L600*W80*H65mm	25W	>80	2500lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-25W-2FT-WOLFE-XX	L600*W80*H65mm	25W	>80	2500lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-16W-4FT-WOLFE-CC	L1200*W80*H65mm	16W	>80	1600lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-16W-4FT-WOLFE-XX	L1200*W80*H65mm	16W	>80	1600lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-20W-4FT-WOLFE-CC	L1200*W80*H65mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-20W-4FT-WOLFE-XX	L1200*W80*H65mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-27W-4FT-WOLFE-CC	L1200*W80*H65mm	27W	>80	2700lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-27W-4FT-WOLFE-XX	L1200*W80*H65mm	27W	>80	2700lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-30W-4FT-WOLFE-CC	L1200*W80*H65mm	30W	>80	3000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-30W-4FT-WOLFE-XX	L1200*W80*H65mm	30W	>80	3000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-20W-5FT-WOLFE-CC	L1500*W80*H65mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-20W-5FT-WOLFE-XX	L1500*W80*H65mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-36W-5FT-WOLFE-CC	L1500*W80*H65mm	36W	>80	3600lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-36W-5FT-WOLFE-XX	L1500*W80*H65mm	36W	>80	3600lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-40W-5FT-WOLFE-CC	L1500*W80*H65mm	40W	>80	4000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated
SSB-40W-5FT-WOLFE-XX	L1500*W80*H65mm	40W	>80	4000lm±5%	100lm/w±5%	AC220-240V-	0.9	Integrated

DIMENSIONS (mm)

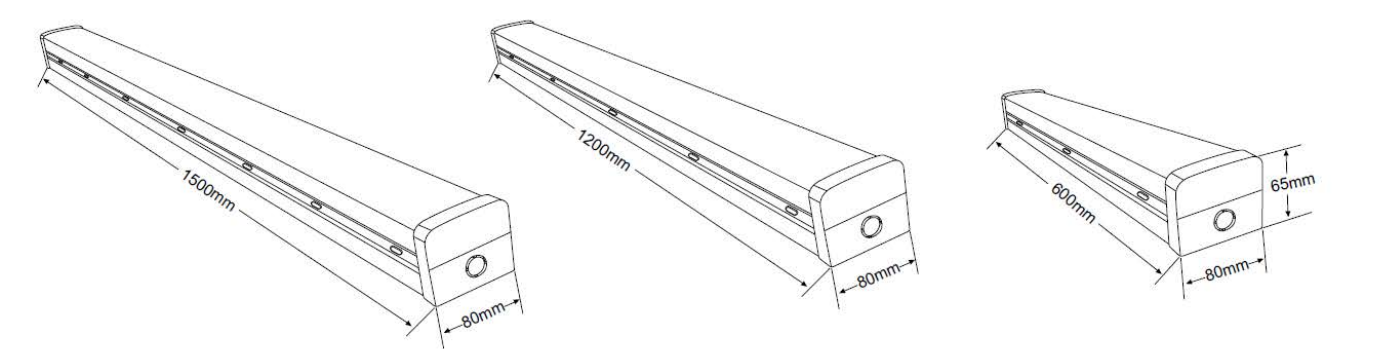

AUTHORISED REPRESENTATIVE

CARBON REDUCTION INSTITUTE



Unit 33, 20-28 Maddox Street
Alexandria, NSW 2015 Australia
ABN 47 622 447 349