

# SSBP SERIES

15W 16W 20W 25W 27W 30W 36W 40W



## SOLID STATE WEATHERPROOF BATTEN



The SSBP series has been product developed for the Australian market allowing superior energy savings without compromising lumen output.

Considered the revolutionary replacement for traditional weatherproof fluroscnt fittings, our SSBP series combines sleek 'tube less' design with top of the range LED components to deliver performance and power for the market place.

### SPECIFICATIONS

CCT	3000k-6000k
Chip Type	2836 White SMD LED
Dimmable	No
Ingress Protection	IP65
Sensor	No
Emergency	No
IPART Approved	Yes

### MAIN FEATURES

- High efficacy rating
- >80 colour render index rating\*
- SAA Approved
- EEIS (ACT) Approved
- 3 Year Warranty
- High grade PC materials
- Weatherproof
- Colour changeable with dip switches

\*Available upon request

### APPLICATIONS

- Carparks
- Fire escapes
- Outdoor lighting

# SSBP SERIES


SOLID STATE WEATHERPROOF LED BATTEN 15W 16W 20W 25W 27W 30W 36W 40W

## PRODUCT PARAMETERS

Part Number	Size	Wattage	CRI	Luminous Flux	Light Efficiency	Input Voltage	Powerfactor	Driver
SSBP-15W-2FT-WOLFE-CC	L600*W120*H80mm	15W	>80	1500lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-15W-2FT-WOLFE-XX	L600*W120*H80mm	15W	>80	1500lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-20W-2FT-WOLFE-CC	L600*W120*H80mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-20W-2FT-WOLFE-XX	L600*W120*H80mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-25W-2FT-WOLFE-CC	L600*W120*H80mm	25W	>80	2500lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-25W-2FT-WOLFE-XX	L600*W120*H80mm	25W	>80	2500lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-16W-4FT-WOLFE-CC	L1200*W120*H80mm	16W	>80	1600lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-16W-4FT-WOLFE-XX	L1200*W120*H80mm	16W	>80	1600lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-20W-4FT-WOLFE-CC	L1200*W120*H80mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-20W-4FT-WOLFE-XX	L1200*W120*H80mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-27W-4FT-WOLFE-CC	L1200*W120*H80mm	27W	>80	2700lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-27W-4FT-WOLFE-XX	L1200*W120*H80mm	27W	>80	2700lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-30W-4FT-WOLFE-CC	L1200*W120*H80mm	30W	>80	3000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-30W-4FT-WOLFE-XX	L1200*W120*H80mm	30W	>80	3000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-36W-4FT-WOLFE-CC	L1200*W80*H65mm	36W	>80	3600lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-36W-4FT-WOLFE-XX	L1200*W80*H65mm	36W	>80	3600lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-20W-5FT-WOLFE-CC	L1500*W120*H80mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-20W-5FT-WOLFE-XX	L1500*W120*H80mm	20W	>80	2000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-36W-5FT-WOLFE-CC	L1500*W120*H80mm	36W	>80	3600lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-36W-5FT-WOLFE-XX	L1500*W120*H80mm	36W	>80	3600lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-40W-5FT-WOLFE-CC	L1500*W120*H80mm	40W	>80	4000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated
SSBP-40W-5FT-WOLFE-XX	L1500*W120*H80mm	40W	>80	4000lm±5%	100lm/w±5%	AC220-240V~	0.9	Integrated

XX - denote colour temperature can be 3K, 4K, 5K, and 6K, which represents 3000K, 4000K, 5000K, and 6000K.  
CC - refers to colour changeable, which can be switched among 3K/4K/6K.

## DIMENSIONS (mm)

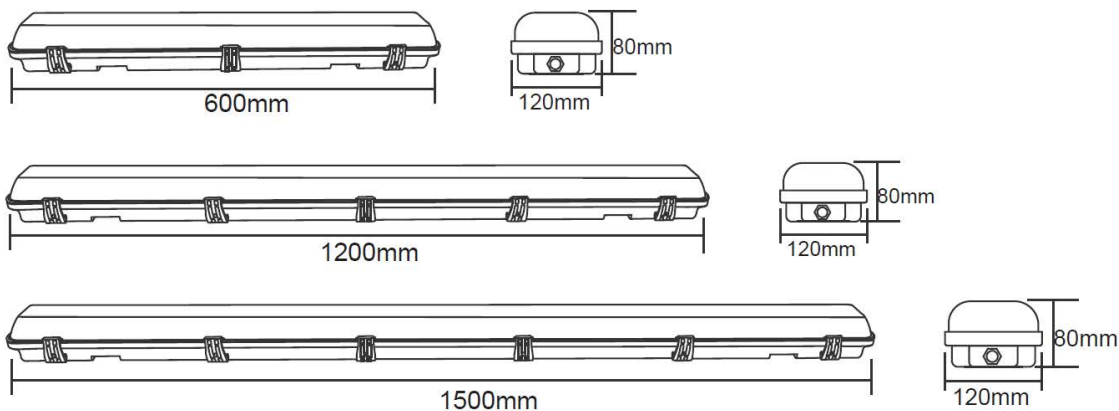

## AUTHORISED REPRESENTATIVE

CARBON REDUCTION INSTITUTE



Unit 33, 20-28 Maddox Street  
Alexandria, NSW 2015 Australia  
ABN 47 622 447 349